

## FRONT INNER FENDERS

07-18 JEEP JK

INFEND-10FB



### TOOLS REQUIRED

- #4, 5 Allen Head
- Scissors

### SKILL LEVEL

- Novice/Intermediate
- 1 (you) to 2 persons

Little skill level required, you can easily install it by yourself however, additional help will be useful

### TIME REQUIRED

- 2.5 Hours

Time to install this should only take about two and half hours.

## WARNINGS/CAUTIONS BEFORE STARTING INSTALLATION

Before you install this kit – Read and understand all instructions, warnings, cautions, and notes contained in this installation instruction guide. Consult your vehicle owner's manual for proper disconnection of electrical and lifting of vehicle if required for installation of this product.

This install may require some technical skills and knowledge of basic mechanical work. If you do not feel that you are capable of performing this install please take this product to a trained professional.

After reading this guide please contact us with any questions or concerns before installing product.  
Customer Service: 855-680-9595

*DV8 Offroad is not responsible for any bodily injury or harm to you or your vehicle as a result of an improper install.*

Proper installation of this kit required knowledge of the factory recommended procedures for removal and installation of original equipment components. We recommend that the factory shop manual and any special tools needed to service your vehicle be on hand during the installation. Installation of this kit without proper knowledge of the factory recommended procedures may affect the performance of these components and the safety of the vehicle

- Always wear eye protection when operating power tools

*Inspect all contents of this package to make sure product is not damaged and all installation hardware has been included. If parts are missing from kit, please be prepared to provide the following information*

1. Name of purchase location
2. Bar Code on side of box
3. Date above bar code
4. Date inside box cover



# INSTALLATION MANUAL

Begin by unpacking all items and inspecting for missing pieces or damage. If you have any concerns, please contact the company the product was purchased from. Extra hardware may be included with the product.

## HARDWARE INCLUDED

- (12) M6x20 Allen Head Bolts
- (2) M6x14 Nutserts
- (12) M6 Spring Washer
- (12) M6 Flat Washers
- (4) M8x25 Allen Head Bolts
- (4) M8 Spring Washers
- (4) M8 Flat Washers




**STEP 1** | Since DV8 inner fenders are not designed to work with stock fender flares, remove and install after market fenders following your fender install instruction.

Once fenders are installed, begin install like the image shown to the right.




**STEP 1** | Assemble the fenders using the M6 hardware and #4 allen head. The mesh piece will sit under the rear section.

Leave slightly loose until later.

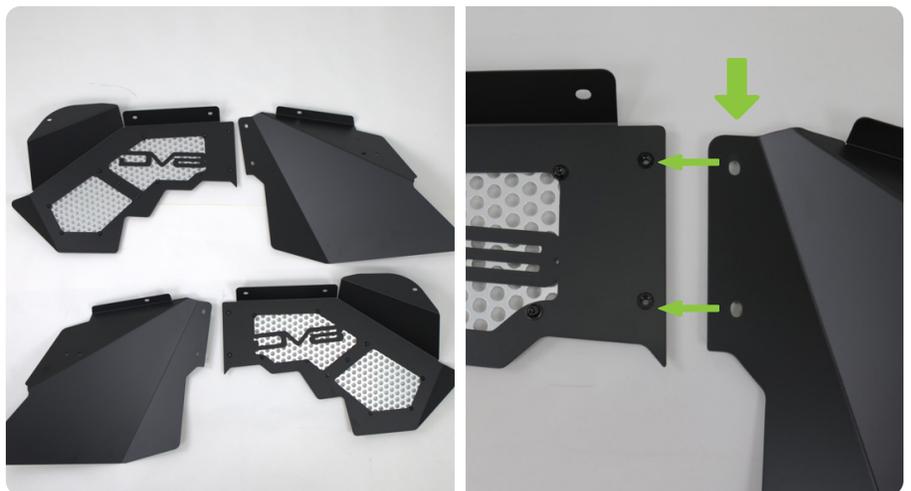

# INSTALLATION MANUAL

**STEP 2 |** Install the provided nutserts using a M6 nutsert tool to the open hole shown in the picture.

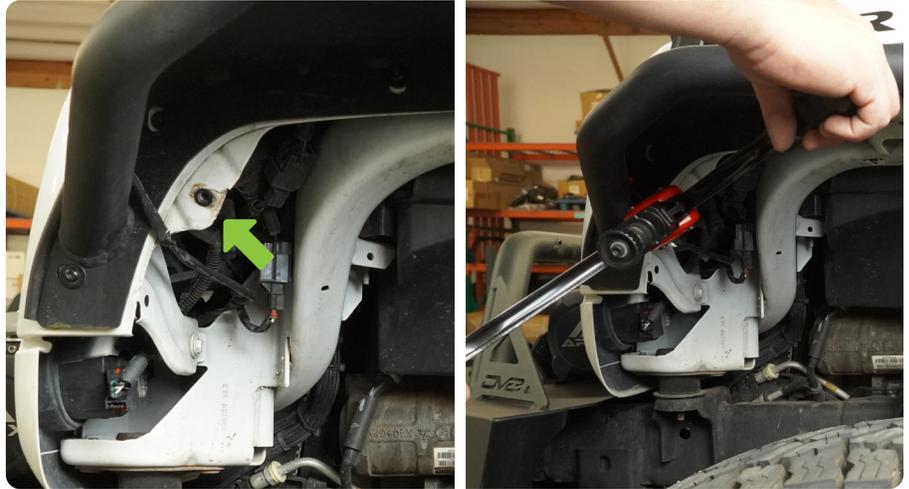

**STEP 3 |** Using the provided M6 hardware and a #4 allen head install the inner fenders into the factory mounting locations along the top and previously install M6 nutsert loosely.



**STEP 4 |** With the inner fender loosely installed, mount the brackets shown labeled "D" for driver and "P" for passenger on the backside of the inner fender.

The bent portion of the tab should rest against the inner lip of the body and hold the inner fender in place.



# INSTALLATION MANUAL

**STEP 5** | Using the provided M8 hardware and #5 allen head, secure into place while pushing the inner fender inward ensuring the bracket is holding the inner fender in place.



**STEP 6** | Once the rear bracket is secure, continue tightening all M6 bolts until inner fender is secure.



# INSTALLATION MANUAL

**STEP 7** | Tighten the two M6 bolts holding the inner fenders together.



**STEP 8** | In the kit, there is provided foam, Cut the foam into pieces and apply where inner fender is making contact with the vehicle. This foam is used to reduce vibration/noise/rattling.

For our install we applied it to the front corner and other location where we found slight noise.





**STEP 9** | Repeat install on other side.

Congratulations, you are done with the install of the DV8 JK Front Inner Fenders.

